# D5F2R-002

# Spring Engaged Friction Brake Flange Mount



## **Engagement/Disengagement**

Spring/Air

# **Facing Type**

**High Coefficient** 

# Torque - Dynamic

1.200 Pound Inches

#### **Minimum Disengagement Pressure**

55 PSI

# **Maximum Operating Pressure**

80 PSI

#### **Maximum RPM**

1,750

#### **Bore Size**

1.688 Inches

#### **Air Volume New**

0.53 Cubic Inches

#### Air Volume Worn

0.96 Cubic Inches

# Finish

Aluminum

#### **Open or Enclosed Construction**


Open

# **Mounting Bolt Circle**


6.563 Inches

# **Shipping Weight**

16 Pounds

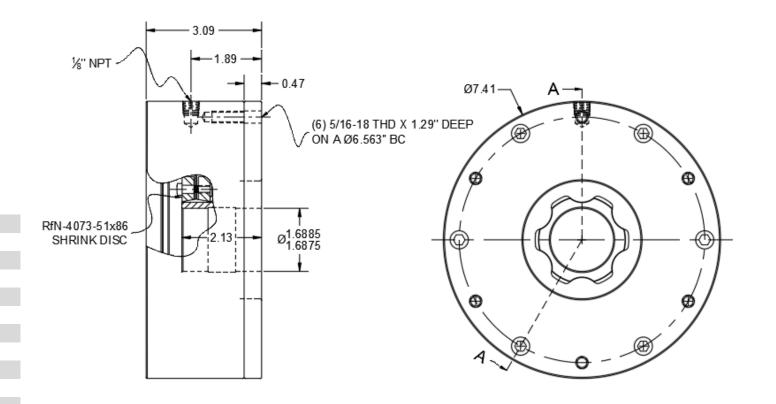

# **TORQUE vs. AIR PRESSURE**



# **NEW vs. BURNISHED TORQUE**

The torque output of a new friction brake or clutch can be up to 40% less than the published torque rating. To achieve full design torque, a unit must be cycled under load to burnish the friction surfaces. The exact number of cycles varies by application.

When calculating required torque always use a safety factor of 1.5 to 2. It is not recommended to select a product for use at its maximum rated torque for continuous duty.

#### PRODUCT SELECTION

Torque capacity is only one factor to consider when making a product selection. Ensure that you will have the right product for the job by contacting our engineering department for application review and selection assistance.




101 Cummings Drive Walton, KY 41094 USA 859-291-0849 machiii.com

engineering@machiii.com

# D5F2R-002

# Parts Diagram

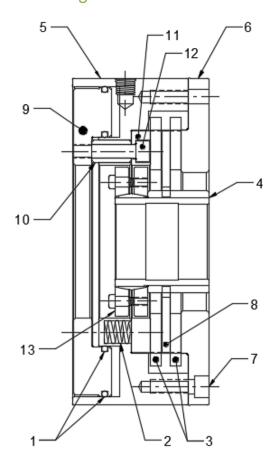

REF#	DESCRIPTION & PARTS INCLUDED	QUANTITY	KIT NUMBER
	REPAIR KIT		D5F2R-002-RPRK
1	"O" Ring	2	
2	Coil Spring	18	
3	Friction Disc	2	
4	DRIVE HUB	1	D5F2R-002-P001
	CYLINDER KIT		D5F2R-002-CYLK
5	Cylinder	1	
6	Top Plate	1	
7	Screw	6	
8	DRIVE DISC	1	D5F2R-002-P005
	PISTON KIT		D5F2R-002-PSTK
9	Piston	1	
10	Spacer	3	
11	Pressure Plate	1	
12	Screw	3	
13	SHRINK DISC	1	D5F2R-002-P062

# **PARTS KITS**

The Repair Kit contains common wear items for this product. Users are encouraged to stock one or more repair kits considering the number of units installed and the potential downtime if machinery on which the unit is installed is critical equipment. To obtain current pricing and lead time for parts kits, contact customer service.

orders@machiii.com

# ADDITIONAL PRODUCT INFORMATION

For illustrated guides showing how Mach III products work, selection guidelines, product manuals, and installation and use recommendations:

https://machiii.com/resources/how-our-products-work

For information about how to order, return policy and warranty information:

https://machiii.com/resources/how-to-order



859-291-0849 machiii.com engineering@machiii.com