

E3D3R-STH

Spring Engaged Friction Clutch
End of Shaft Bored, Pilot Mount



Minimum Sprocket Sizes

Chain Size	35	40	50	60
Minimum Teeth	33	25	21	18

Engagement/Disengagement

Spring/Air

Facing Type

High Coefficient

Torque @ 0 PSI – Dynamic

506 Pound Inches

Minimum Disengagement Pressure

77 PSI

Maximum Operating Pressure

90 PSI

Maximum RPM

1,500

Bore Range with Standard Keyway

0.625 (16) to 1.000 (24) Inches (mm)

Air Volume/Cycle

0.41 Cubic Inches

Finish


Aluminum

Open or Enclosed Construction


Enclosed

Shipping Weight

5 Pounds

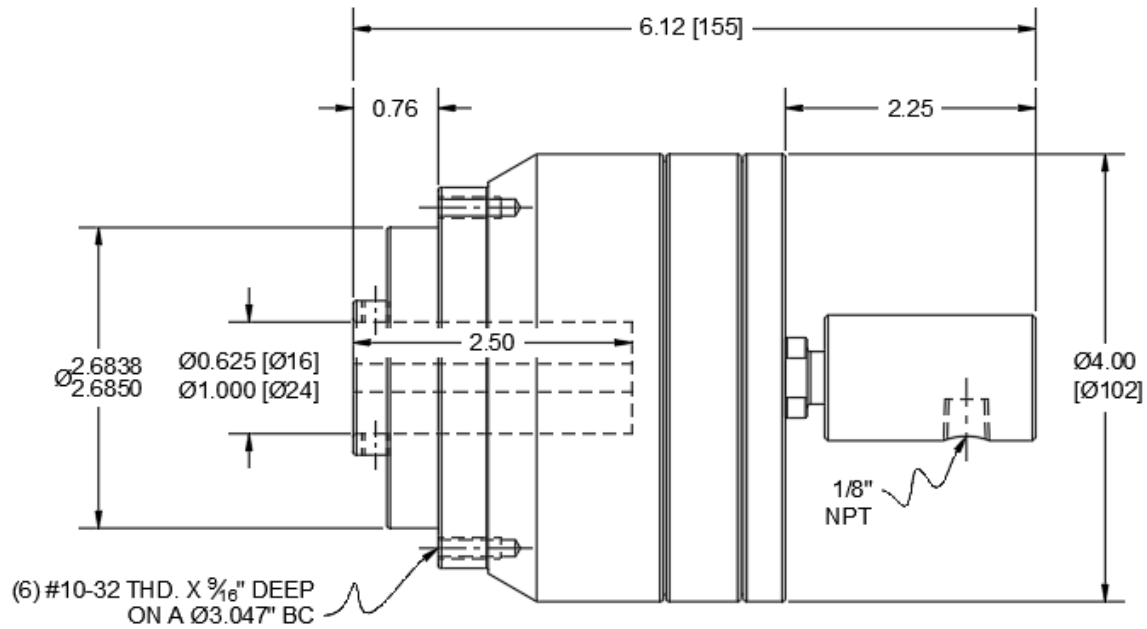

TORQUE vs. AIR PRESSURE

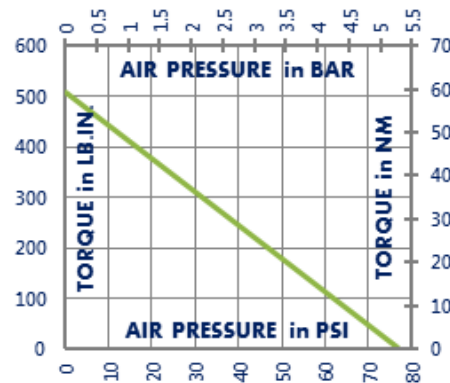

NEW vs. BURNISHED TORQUE

The torque output of a new friction brake or clutch can be up to 40% less than the published torque rating. To achieve full design torque, a unit must be cycled under load to burnish the friction surfaces. The exact number of cycles varies by application.

When calculating required torque always use a safety factor of 1.5 to 2. It is not recommended to select a product for use at its maximum rated torque for continuous duty.

PRODUCT SELECTION

Torque capacity is only one factor to consider when making a product selection. Ensure that you will have the right product for the job by contacting our engineering department for application review and selection assistance.



1580 Lake Street
Elmira, NY 14901 USA


859-291-0849

machiii.com

engineering@machiii.com

E3D3R-STH

Parts Diagram

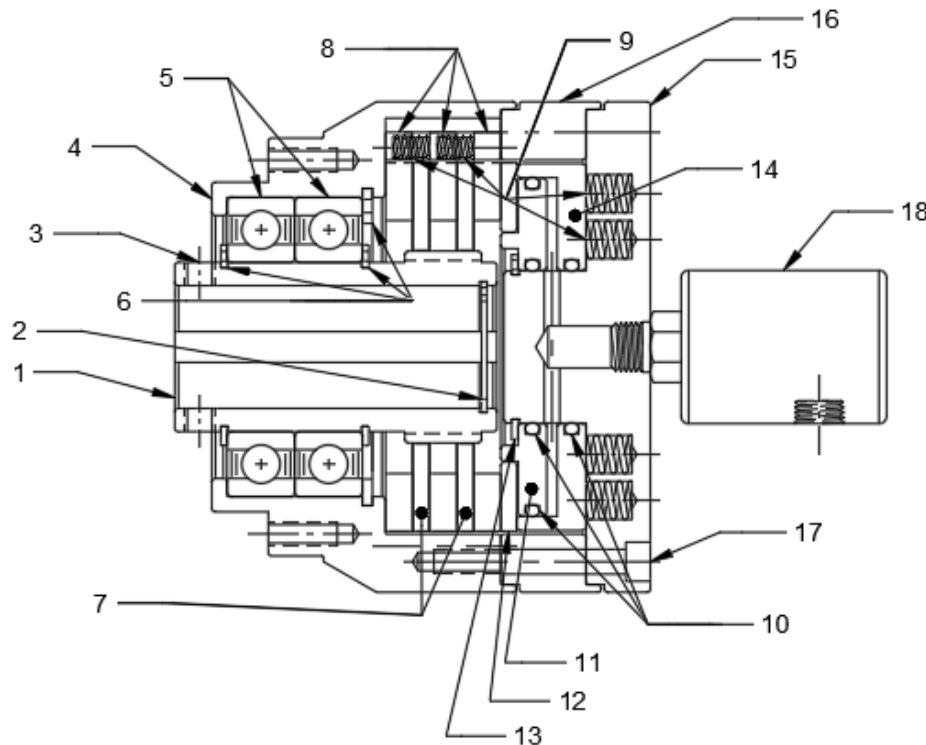

REF#	DESCRIPTION & PARTS INCLUDED	QUANTITY	KIT NUMBER
	DRIVE HUB KIT		E3D3R-STH-HUBK
1	Drive Hub	1	<i>Specify Bore Size When Ordering</i>
2	Retainer Ring	1	
3	Set Screw	2	
	SLEEVE KIT		E3D3R-STH-SLVK
4	Sleeve	1	
5	Bearing	2	
6	Retainer Ring	3	
	DRIVE DISC KIT		E3D3R-STH-DRDK
7	Drive Disc	2	
	REPAIR KIT		E3D3R-STH-RPRK
8	Friction Disc	3	
9	Coil Spring	35	
10	O-Ring	3	
	PISTON KIT		E3D3R-STH-PSTK
11	Piston	1	
12	Pressure Plate	1	
13	Retainer Ring	1	
14	Spring Retainer	1	
	CYLINDER KIT		E3D3R-STH-CYLK
15	Cylinder	1	
16	Spacer	1	
17	Screw	3	
18	ROTATING SEAL	1	RSEAL-032

PARTS KITS

The *Repair Kit* contains common wear items for this product. Users are encouraged to stock one or more repair kits considering the number of units installed and the potential downtime if machinery on which the unit is installed is critical equipment. To obtain current pricing and lead time for parts kits, contact customer service.

orders@machiii.com

ADDITIONAL PRODUCT INFORMATION

For illustrated guides showing how Mach III products work, selection guidelines, product manuals, and installation and use recommendations:

<https://machiii.com/resources/how-our-products-work>

For information about how to order, return policy and warranty information:

<https://machiii.com/resources/how-to-order>



859-291-0849

machiii.com

engineering@machiii.com