

X5C2R-56H

Combination Air Engaged Friction Clutch, Spring Engaged Friction Brake, Stop & Start the Shaft
NEMA 56C Frame Mount



Suitable for pulley output

Clutch Engagement/Brake Engagement

Air/Spring

Facing Type

High Coefficient

Clutch Torque @ 80 PSI (max) – Dynamic

495 Pound Inches

Brake Torque @ Spring Pressure (fixed)

197 Pound Inches

Brake Release Pressure

20 - 30 PSI

Maximum RPM

1,750

Input Bore/Output Shaft

0.625 Inches

Air Volume New

2.03 Cubic Inches

Air Volume Worn

2.86 Cubic Inches

Finish

Aluminum

Open or Enclosed Construction


Enclosed

Overhung Load Capacity


93 Pounds

Shipping Weight

29 Pounds

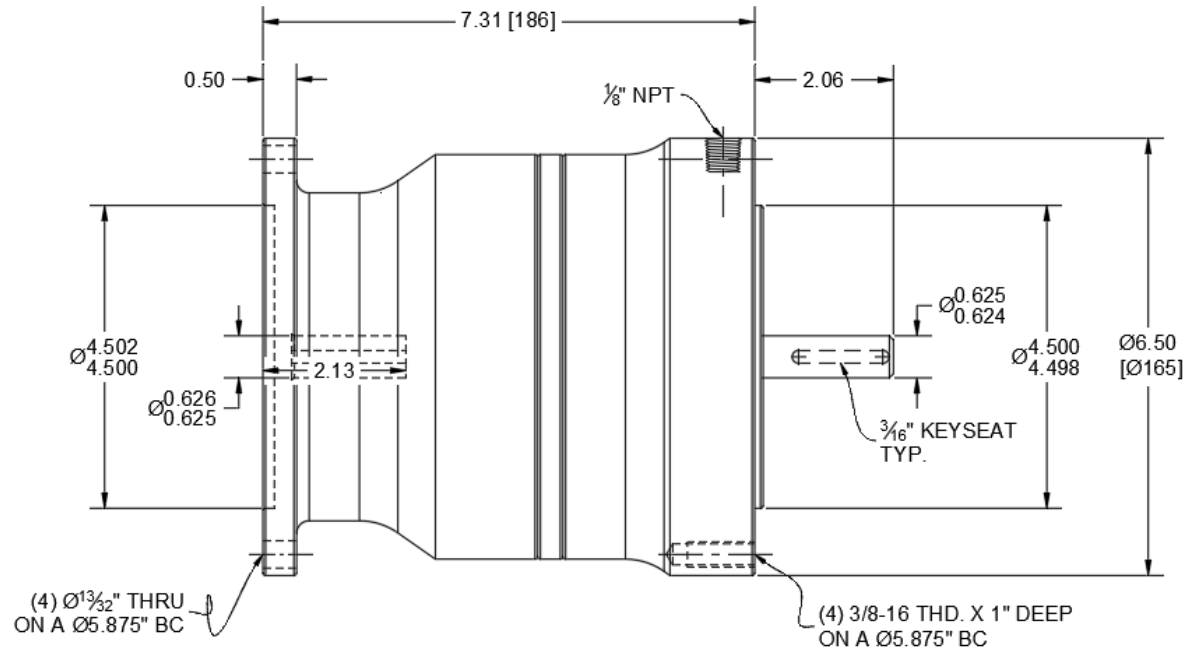

TORQUE vs. AIR PRESSURE

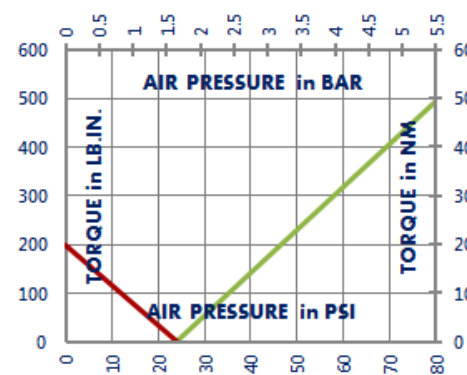

NEW vs. BURNISHED TORQUE

The torque output of a new friction brake or clutch can be up to 40% less than the published torque rating. To achieve full design torque, a unit must be cycled under load to burnish the friction surfaces. The exact number of cycles varies by application.

When calculating required torque always use a safety factor of 1.5 to 2. It is not recommended to select a product for use at its maximum rated torque for continuous duty.

PRODUCT SELECTION

Torque capacity is only one factor to consider when making a product selection. Ensure that you will have the right product for the job by contacting our engineering department for application review and selection assistance.



1580 Lake Street
Elmira, NY 14901 USA


859-291-0849

machiii.com

engineering@machiii.com

X5C2R-56H

Parts Diagram

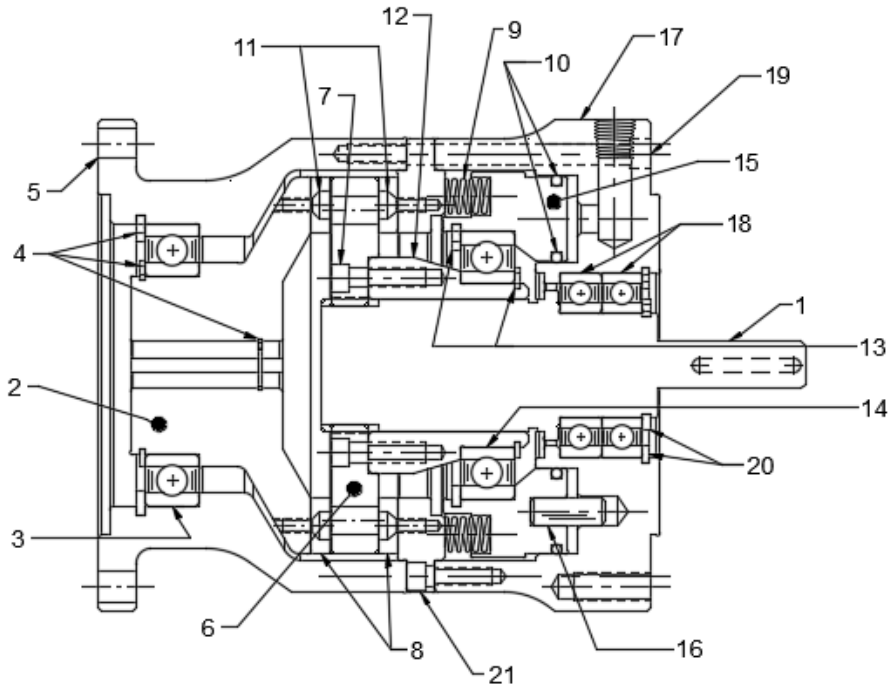

REF#	DESCRIPTION & PARTS INCLUDED	QUANTITY	KIT NUMBER
	DRIVE HUB KIT		X5C2R-56H-HUBK
1	Drive Hub	1	
	ADAPTER KIT		X5C2R-56H-ADPK
2	Female Hub	1	
3	Bearing	1	
4	Retainer Ring	3	
5	Adapter Female	1	
	DRIVE DISC KIT		X5C2R-56H-DRDK
6	Drive Disc	1	
7	Screw	6	
	REPAIR KIT		X5C2R-56H-RPRK
8	Friction Disc	2	
9	Spring	24	
10	O-Ring	2	
11	Screw	12	
	PISTON KIT		X5C2R-56H-PSTK
12	Cone	1	
13	Retainer Ring	2	
14	Bearing	1	
15	Piston	1	
16	Pin	2	
	CYLINDER KIT		X5C2R-56H-CYLK
17	Adapter Male	1	
18	Bearing	2	
19	Screw	12	
20	Retainer Ring	2	
21	Brake Adapter	1	

PARTS KITS

The *Repair Kit* contains common wear items for this product. Users are encouraged to stock one or more repair kits considering the number of units installed and the potential downtime if machinery on which the unit is installed is critical equipment. To obtain current pricing and lead time for parts kits, contact customer service.

orders@machiii.com

ADDITIONAL PRODUCT INFORMATION

For illustrated guides showing how Mach III products work, selection guidelines, product manuals, and installation and use recommendations:

<https://machiii.com/resources/how-our-products-work>

For information about how to order, return policy and warranty information:

<https://machiii.com/resources/how-to-order>



859-291-0849

machiii.com

engineering@machiii.com